


# LOCKN LUBE®

603.795.2298 • [www.locknlube.com](http://www.locknlube.com) • [sales@locknlube.com](mailto:sales@locknlube.com)

## XL Grease Coupler

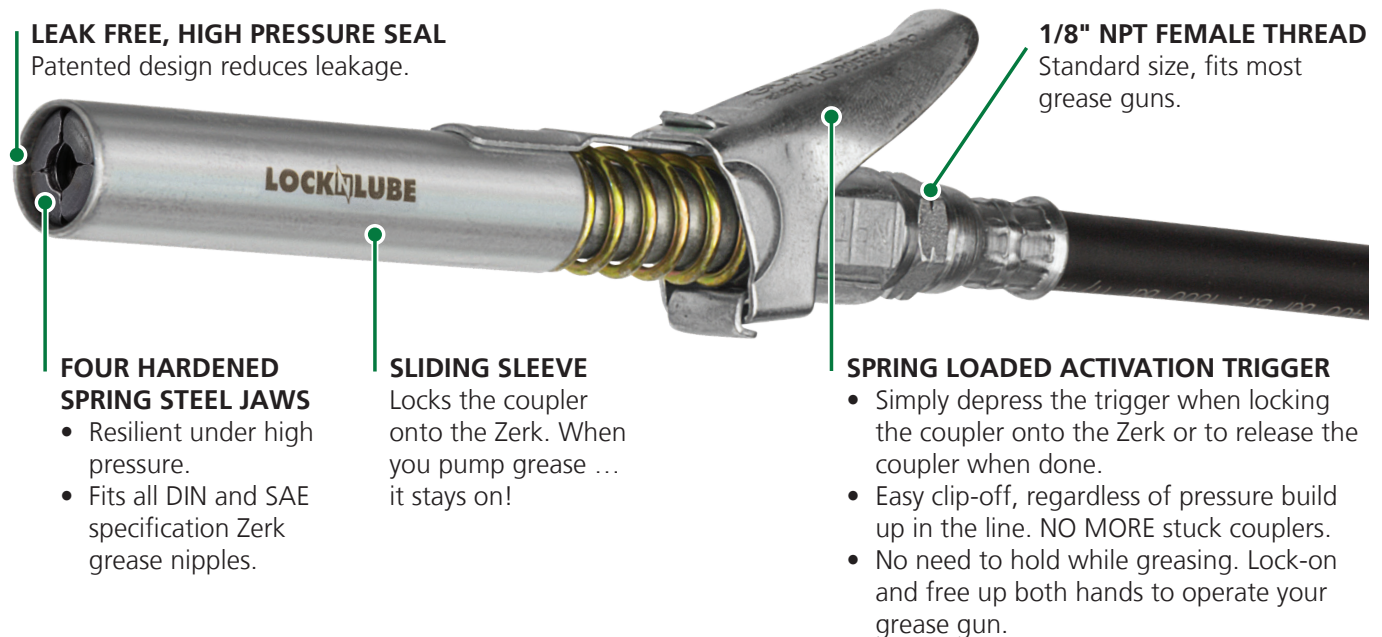

DESCRIPTION	SPECIFICATION
Max Pressure	10,000 psi (690 Bar)
Zerk Compatibility	Fits all DIN and SAE specification Zerks (grease nipples)
Coupler Thread	1/8" NPT female thread
Dimensions	L: 5 1/2" x W: 31/32" x H: 1 1/2" (L: 88 x W: 16.4 x H: 41 mm)
Diameter (front coupler)	31/32" (16 mm). Fits most recessed Zerks (grease nipples)
Weight	6 oz (165 g)
Grease Gun Compatibility	Works with all grease gun types: pneumatic, manual and electric
Seal	Durable TPU seal for longevity under high pressure
Lock-on Mechanism	Four hardened spring steel jaws are resilient under high pressure
Patents	WO 2011/069172, others on application

To order call 603.795.2298 or email [sales@locknlube.com](mailto:sales@locknlube.com)